

Features

- 16V Series with rated capacitance of 108F, 200F, 266F, 333F and 500F
- Highest power performance with ultra-low internal resistance
- Integrated UMU (Ultracapacitor Management Unit) for:
 - Individual cell balancing
 - Voltage and temperature diagnosis by logic output
 - Optional CAN or RS communication interface
- Rugged design for harsh environments
- Typical applications:
 - Transportation and automotive
 - Industrial UPS and DVR



Specifications

Rated Capacitance (F)	Internal Resistance (mΩ)		Max Current ¹ (A)	Leakage Current (mA)	Stored Energy (Wh)	Specific Energy (Wh/kg)	Nominal Weight (kg)	Part Number
	Discharge with constant current at 25°C	AC (100Hz)						
108	< 3.6	< 4.3	580	< 1.5	3.9	1.05	3.7	EMHSR-0108C0-016R0S
200	< 2.9	< 3.5	930	< 2.7	7.2	1.75	4.1	EMHSR-0200C0-016R0S
266	< 2.5	< 3.0	1,160	< 3.0	9.7	2.10	4.6	EMHSR-0266C0-016R0S
333	< 2.0	< 2.4	1,450	< 4.2	12.1	2.37	5.1	EMHSR-0333C0-016R0S
500	< 1.6	< 1.9	2,020	< 5.2	18.2	3.03	6.0	EMHSR-0500C0-016R0S

Rated Voltage, V_R		16.2V DC	
Surge Voltage		17.1V DC	
Capacitance Tolerance		0% / +20%	
Operating Temperature Range		-40 ~ 65°C	$ \Delta CAP < 5\%$ and $\Delta ESR < 150\%$ of initial value measured at 25°C
Storage Temperature Range		-40 ~ 70°C	
Lifetime	Endurance	1,500 hours at V_R and 65°C	$ \Delta CAP < 20\%$ and $\Delta ESR < 60\%$ of specified value
	At Room Temperature	10 years ² at V_R	$ \Delta CAP < 30\%$ and $\Delta ESR < 150\%$ of specified value
Cycle Life		1,000,000 cycles between V_R and $1/2V_R$ using constant current charge and discharge at 25°C	$ \Delta CAP < 30\%$ and $\Delta ESR < 150\%$ of specified value
Electronics (Ultracapacitor Management Unit)	Balancing	Active Balancing	
	Monitoring	Over Voltage : High and Low signal Temperature : NTC	Requires external 5V DC input, configurable to user specific requirements
	Communications	High/Low Logic signal Optional CAN 2.0B, J1939 or RS485 interface	
	Signal Output	4 pin connector	
Output Terminals	M8 screw holes		
Enclosure	Insulation Coordination	Rated insulation voltage : 1kV DC Or 2.8kV AC (50Hz, 10sec) Rated impulse withstand voltage : 6kV DC	IEC 61287-1 (Cat. : OV II)
	Protection Degree	IP 65 (Dust-tight and protected against water jets)	IEC 60529
	Vibration & Shock Resistance	SAE J2380 : Vibration SAE J2464 : Shock	
	Mounting	8 locations, M8 holes on top and bottom covers	

1 – Warning: this value should not be used as continuous current


2 – Lifetime at room temperature is a provisional value

© NESSCAP 2010. All rights reserved. Design and specifications subject to change without notice.

Nesscap, Co., Ltd.
 (446-901) 750-8 Gomae-dong, Giheung-gu, Yongin-si, Gyeonggi-do, South Korea
 Tel: +82-31-289-0721 Fax: +82-31-286-6767 E-mail: marketing@nesscap.com
 Web: www.nesscap.com

ISO 9001, 14001, and TS 16949 certified

Dimensions

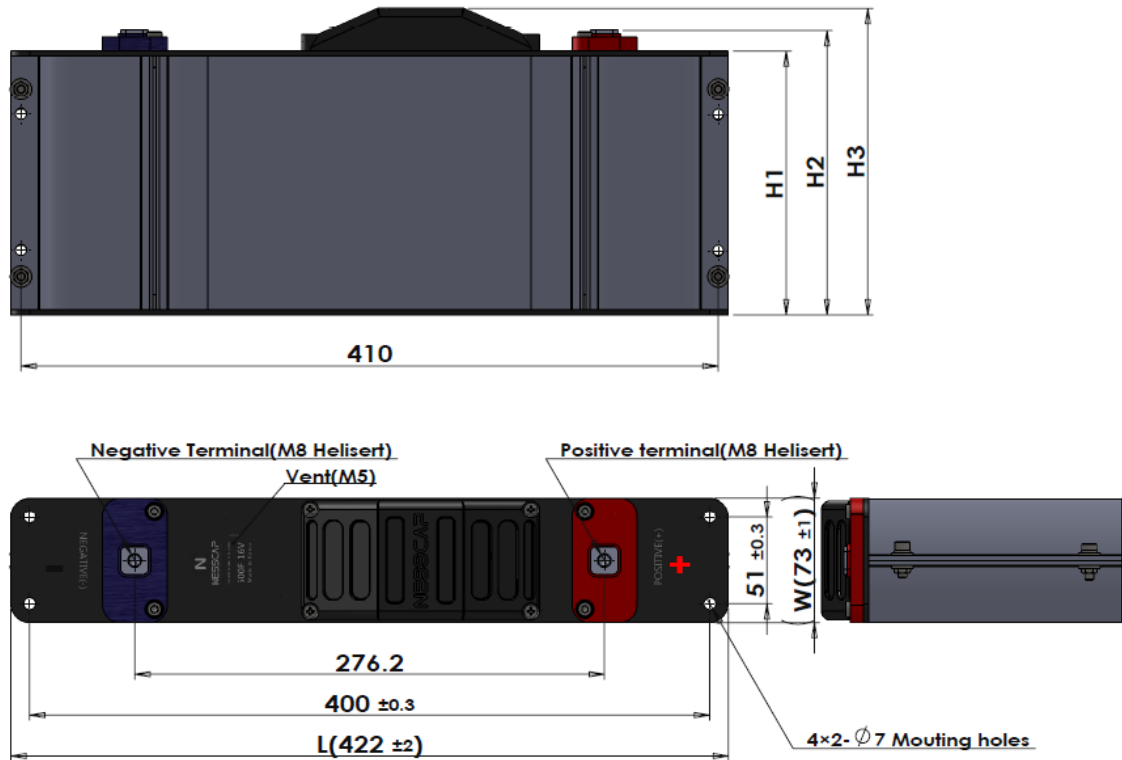

Part Number	Capacitance (F)	Dimensions (mm)				
		L(±2.0)	W(±1.0)	H1(Max)	H2(Max)	H3(Max)
EMHSR-0108C0-016R0S	108	422	73	68.5	80.5	93.5
EMHSR-0200C0-016R0S	200	422	73	91	103	116
EMHSR-0266C0-016R0S	266	422	73	102	114	127
EMHSR-0333C0-016R0S	333	422	73	119	131	144
EMHSR-0500C0-016R0S	500	422	73	155	168	180

TEXIM EUROPE

Partner in Electronic Components & Supply Chain Solutions



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen
Tel: +31 (0)53 573 33 33
Fax: +31 (0)53 573 33 30
nl@texim-europe.com



Denmark

Nørregade 15
DK-9240 Nibe
Tel: +45 88 20 26 30
Fax: +45 88 20 26 39
nordic@texim-europe.com



Belgium

Gentsesteenweg 1154-C22
Chaussée de Gand 1154-C22
B-1082 Brussel / Bruxelles
Tel: +32 (0)2 462 01 00
Fax: +32 (0)2 462 01 25
belgium@texim-europe.com



United Kingdom

St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS
Tel: +44 (0)1522 789 555
Fax: +44 (0)845 299 22 26
uk@texim-europe.com



Germany

Justus-von-Liebig-Ring 7-9
D-25451 Quickborn
Tel: +49 (0)4106 627 07-0
Fax: +49 (0)4106 627 07-20
germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München
Tel: +49 (0)89 436 086-0
Fax: +49 (0)89 436 086-19
germany@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg
Tel: +43 (0)662 216026
Fax: +43 (0)662 216026-66
austria@texim-europe.com

Texim Europe B.V.

Elektrostraat 17
NL-7483 PG Haaksbergen
Tel: +31 (0)53 573 33 33
info@texim-europe.com
www.texim-europe.com

